

Winkelprofil Nr. 162, 24,5 x 20 mm

- Aluminium.
- Selbstklebend.

TÜV Zertifikat-Nr. 44 780 14206214

Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)
Pulverbeschichtung:	optional (RAL/Metallic/Holzdekor)

Klebstoff	
Schmelzhaftklebstoff (synthetische Kautschukbasis)	
Viskosität:	10.000 +/- 3.000 mPa.s (170°C)
(Brookfield RVT DV-II, Sp 27 ASTM D 3236)	
FDA Status:	gemäß § 175.105 Adhesives
Transportschutz:	abgedeckt mit Silikonpapier


Geeignet für: Designbelag / LVT Click und Loose Lay, Designbelag / LVT Dryback, Laminat / Multilayer

Montageart: Kleben

Längen: 300 cm, 270 cm, 100 cm, 90 cm

Farben: gold, sahara, silber, bronze, Edelstahl matt, Edelstahl gebürstet, schwarz pulverbeschichtet (RAL 9005), anthrazit metallic, grau metallic, Buche, Eiche dunkel, Eiche hell, Nussbaum, Eiche grau

**Winkelprofile sind ideal geeignet als kleiner Treppenwinkel, als Türschwellenprofil oder als Abschluss an Podesten.
Sie schützen die Kanten des Bodenbelags dauerhaft.**

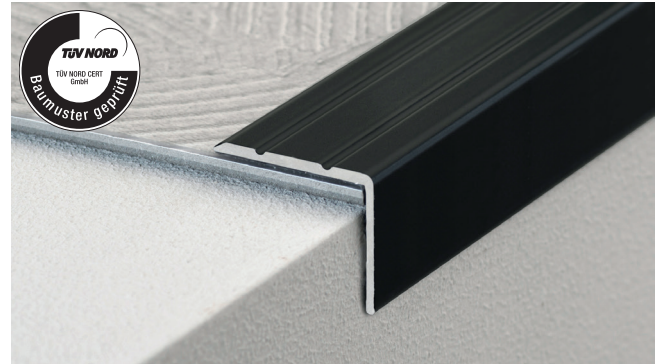

Angle edge no. 162, 24.5 x 20 mm

- Aluminium.
- Auto-adhesive.

TÜV certification no. 44 780 14206214

Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)
Powdercoating:	optional (RAL/metallic/woodstyle)

Adhesive	
hotmelt adhesive (synthetic rubber-based)	
Viscosity:	10.000 +/- 3.000 mPa.s (170°C)
(Brookfield RVT DV-II, Sp 27 ASTM D 3236)	
FDA state:	acc. to § 175.105 Adhesives
Protection:	covered with silicone paper

Suitable for: Design flooring / LVT click and loose lay, Design flooring / LVT dryback, Laminate / multilayer

Installation: gluing

Lengths: 300 cm, 270 cm, 100 cm, 90 cm

Colours: gold, sahara, silver, bronze, stainless steel matt, stainless steel brushed, black powdercoated (RAL 9005), anthracite metallic, grey metallic, beech, oak dark, oak light, walnut, Oak grey

**Angle edges are ideally suited as a small staircase angle, as a door threshold profile or as a termination on platforms.
They protect the edges of the flooring permanently.**